

DELTA®

HIGH PERFORMANCE AIR & MOISTURE BARRIERS

DÖRKEN

DELTA®-DRY

Ventilated Rainscreen For Absorptive Claddings.



Controls moisture in wall assemblies.
Keeps walls dry.





Critical Drainage and Drying for Exterior Walls.

DELTA®-DRY

High Performance Rainscreen System.



AC308 Approved
AC208 Approved
UES-908

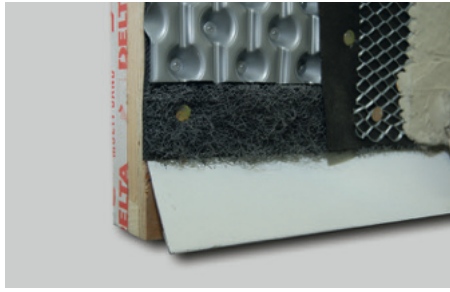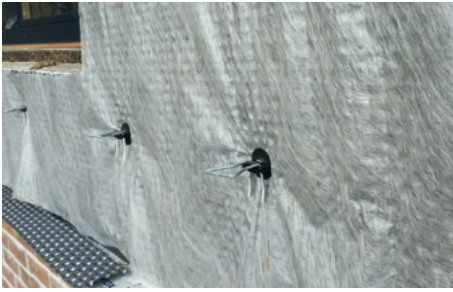

DELTA®-DRY STUCCO & STONE

Ventilated Rainscreen with Pre-installed Mortar Screen for Adhered Stone and Conventional Stucco Claddings.™

DELTA®-DRY STUCCO & STONE has a mortar screen factory-installed on the exterior side of the membrane. This prevents scratch coats from filling the drainage and ventilation channels during application.

- Excellent water resistance
- Outstanding drainage capacity
- Exceptional drying capability
- Full capillary break
- Stops solar-driven moisture
- Advanced technology
- Extremely durable
- Easy to install

Technical Data Overview:

Test	Method	Units	Results
Ventilation/Airflow	ASTM E2925-14	L/s	1.18 @ 10 Pa* 1.41 @ 10 Pa**
Drainage	ASTM D5199-12	%	1.94* 0.65**
Thickness	ASTM D5199-12	mm	10.76
Compression Strength	ASTM D6364-06	kPa	123.2
UV Exposure	ASTM D6364-06	kPa	116.5
Heat Aging	ASTM D6364-06	kPa	136.5
Mold/Fungal Growth	ASTM C1338-14	Visual	No Mold
Water Exposure	ASTM D6364-06	kPa	126.8

* Test Results performed with insect screen.

** Test Results performed without insect screen.



DELTA® System
Ventilated rainscreen
For Absorptive
Screen de pluie
pour le bardage

DELTA®-DRY

Ventilation required on TOP and BOTTOM
For details go to www.delta-dry.com
Ventilation requise en haut et en bas
pour le bardage. Consultez le site
www.delta-dry.com pour plus de détails

1-888-4DELTA4 (433-5824)
www.delta-dry.com

DELTA®-Accessories for DELTA®-DRY.

Dörken makes your life easier – systematically.

You are sure to appreciate these handy DELTA®-Accessories:



DELTA®-BUG SCREEN

Resist insects while allowing full drainage and ventilation.



DELTA®-MULTI-BAND

A versatile acrylic adhesive tape with very strong adhesion.



DELTA®-FLEXX BAND

Highly stretchable rubber bitumen for sealing penetrations and detail areas.

DELTA®



0/22/ 2025



Dörken Systems Inc.
4655 Delta Way
Beamsville,
ON L3J 0T6, Canada
Tel.: +1 (905) 563 3255
Fax: +1 (905) 563 5582
info@dorken.com
www.dorken.com

A DÖRKENGROUPE company

■ The information printed in this brochure reflects product information and specifications at the date of printing. The manufacturer reserves the right to make changes when necessary.

All rights reserved.

DELTA®-branded quality products manufactured by Dörken.

■ Visit us on:

